


Air treatment unit

FIC/FIH/FIX

10 → 28 kW

Main applications

- Stores in urban area
- Small size office buildings
- Bank offices
- Restaurant & Bars

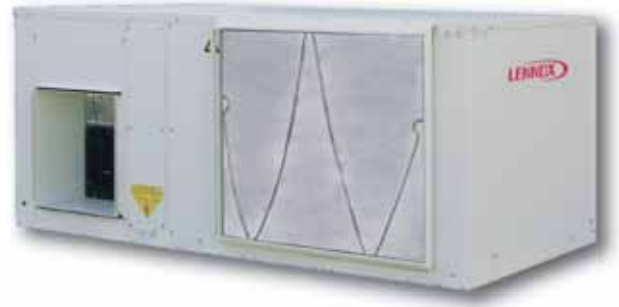


FIX/FIC/FIH		10	10	12	15	20	25	30
Cooling mode								
Net cooling capacity ⁽¹⁾	kW	9,7		12,1	15,0	19,5	23,5	27,0
Heating mode								
Net heating capacity ⁽²⁾	kW	10,0		12,5	15,5	20,5	25,0	27,9
Electric heater capacity (option) Standard/Medium/High		3/6/-	3/6/9	4,5/6/9			7,5/9/12	
Air treatment section								
Minimum airflow rate	m ³ /h	1500		1650	2410	3090	3455	3695
Nominal airflow rate		2140		2040	3170	4500	5470	5060
Maximum airflow rate		2350		2300	3575	4850	5750	5500
Maximum available static pressure	Pa	120		110	160	200	240	180
Acoustic data								
Global sound power level ⁽³⁾	dB(A)	72			76	80	84	83

(1) : Ambient air temperature : 27 °C DB, 19 °C WB
Outdoor air temperature : 35 °C DB, 24 °C WB.

(3) : EUROVENT conditions.

(2) : Ambient air temperature : 20°C DB, 12°C WB
Outdoor air temperature : 7°C DB, 6°C WB.

Dimensions

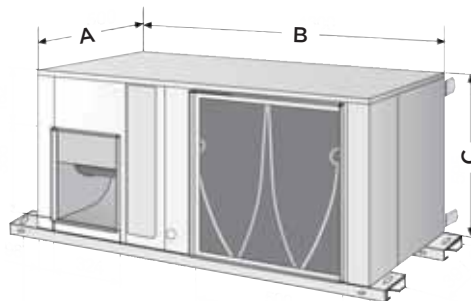

FIX/FIC/FIH		10	12	15	20	25	30
A	mm	430	430	500	620	775	775
B		1250	1250	1300	1450	1500	1500
C		500	500	595	595	645	645
Weight	kg	58	58	85	109	121	131